


# ELECTRONIC CLIMATE CONTROL Temperature Probe

## SERVICE BULLETIN

*To minimize large temperature swings in the motor home.*

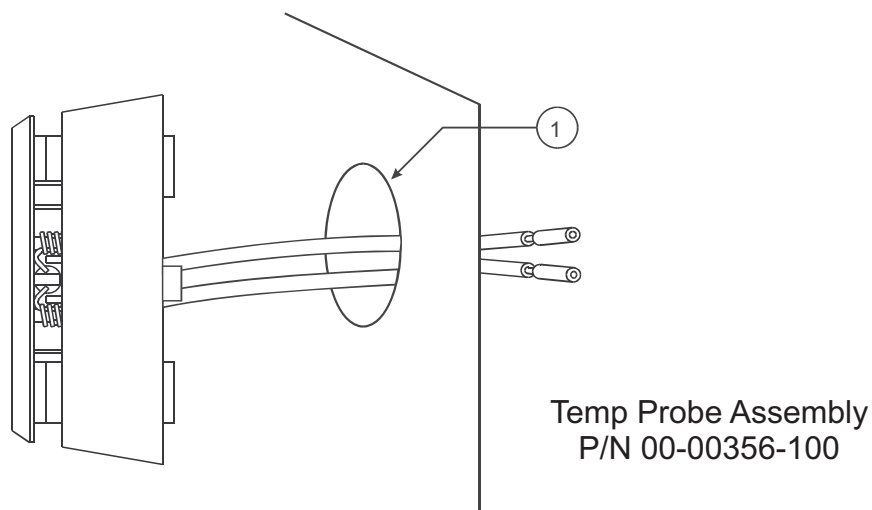

### Recommended Mounting

- 1) Wire feed-thru hole in mounting surface must be sealed with RTV caulk, or gasket.
- 2) Splice wires from the Temp. Probe assembly (00-00356-100) together with the wires coming out of the wall. Polarity is NOT important.
- 3) Push wires back into wall and screw the assembly into place.
- 4) Mount in a place where ambient temperature will likely be sensed.
- 5) Can be mounted on an internal wall, under cabinet or counter-top (**NOT** an external wall, or inside a cabinet).  
Mount at least 6 inches from any external surface and 24 inches from the floor.  
**DO NOT** mount inside a closet, or next to any heat generating appliance.

**Intellitec**

1485 Jacobs Rd.  
Deland, FL 32724  
386.738.7307