

5 - Minute Light Timer

Intellitec's 5-Minute Light Timer offers the RV owner a delayed light off function. When the owner activates the lighting circuit but forgets to turn it off, the Intellitec 5-Minute Light Timer will automatically turn off the circuit and prevent additional battery drainage.



Part Number 00-00256-000

The unit will handle up to 5 Amps of incandescent lamps. It is a two terminal controller that wires in series with the light. It can be wired either in the high side or lo side of the circuit.

Reverse Polarity protected

Connecting the timer incorrectly will not damage the unit, so long as the current drawn by the load remains within the 5 Amp rating.

 **Intellitec**
1485 Jacobs Rd.
Deland, FL 32724
386.738.7307


P/N 53-00256-000 Rev. C 043020

5 - Minute Light Timer

Specifications:

Part Number : 00-00256-000
Operating Voltage: 9 to 30 VDC
Current carry capabilities: 5 Amps
Surge Rating Up to 15 Amps for 1 second
Operating Ambient -40° to $+85^{\circ}$ C

Wiring Diagram:

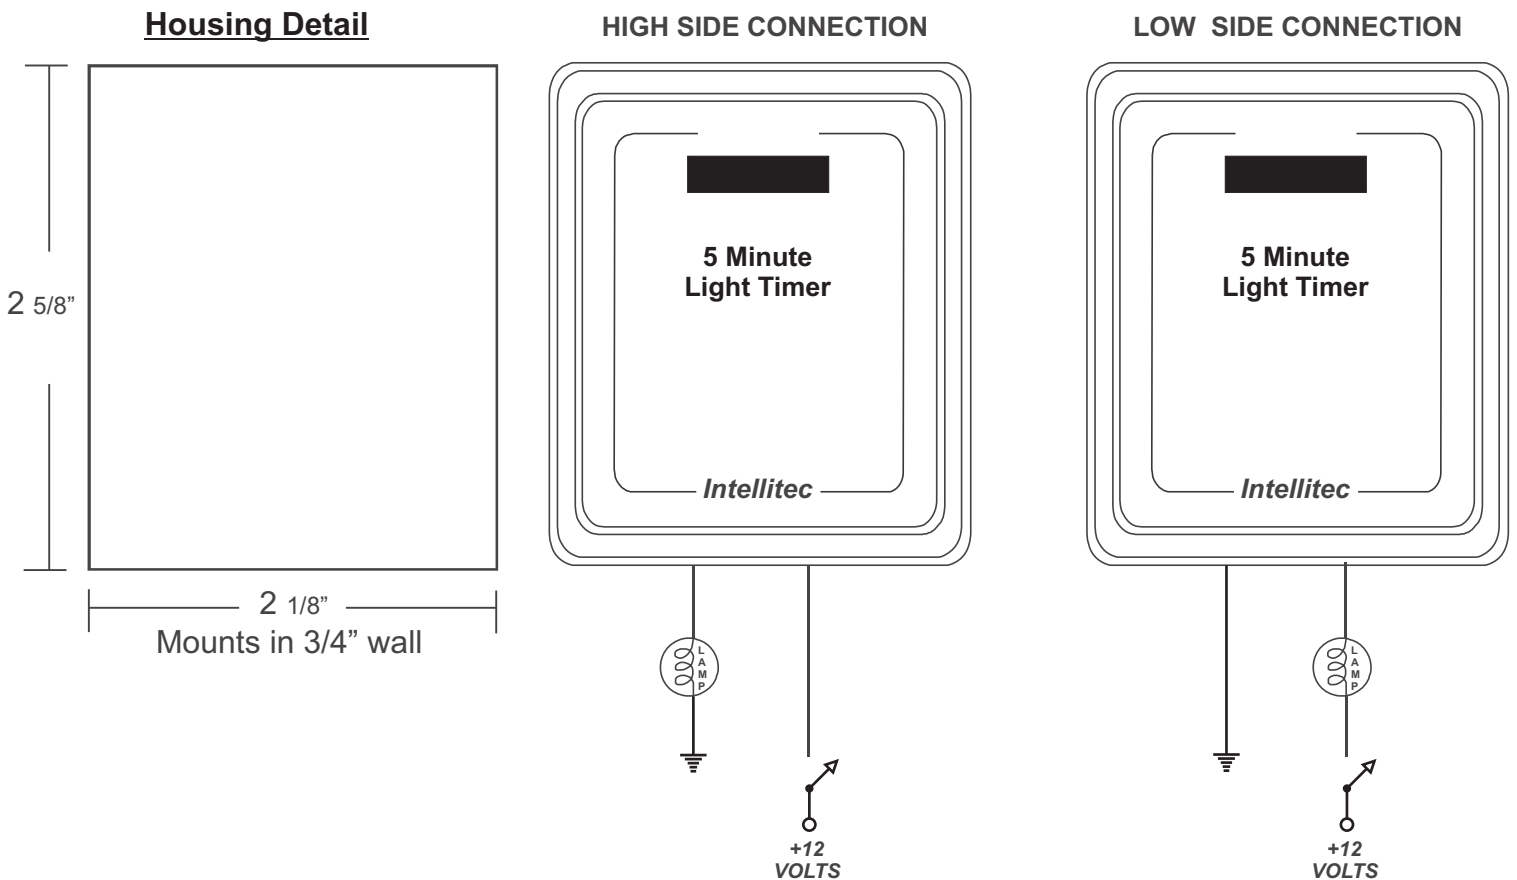

 **Intellitec**
1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00256-000 Rev. C 043020